
EECS 122 - COMMUNICATION NETWORKS - Spring 2001

Midterm #1, 2/16/01: SOLUTIONS

Professor Walrand

1. Packet Formats (5 out of 20)

The notation is as in the lectures and notes: For Ethernet, [EDA | ESA | ?] and for IP packets, [IPSA | IPDA | ?].

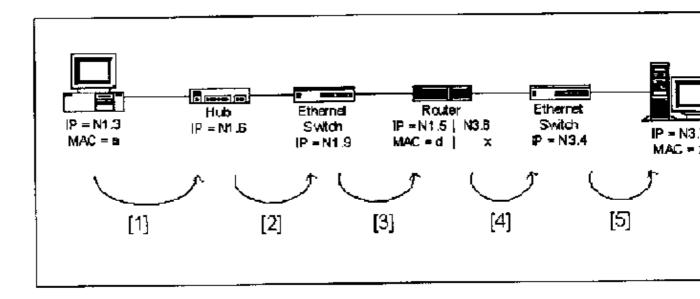

Computer N1.3 sends a packet to computer N3.7. Select the appropriate formats for the packet as it goes through the li among the following choices:

P1: [N1.3 | N1.6 | data]

P2: [d|a|N1.3|N3.7|data]

P3: [d|a|N1.3|N1.5|data]

P4: [z|a|N1.3|N1.5|data]

P5: [d|a|N1.6|N1.9|data]

P6: [z|a|N1.6|N1.9|data]

P7: [d|a|N1.9|N1.5|data]

P8: [x|a|N1.3|N3.6|data]

P9: [x | a | N1.3 | N1.5 | data]

P10: [z|a|N1.3|N3.4|data]

P11: [z | a | N1.3 | N3.7 | data]

P12: [z | x | N3.6 | N3.4 | data]


P13: [z | x | N1.3 | N3.7 | data]

P14: [z | x | N3.6 | N3.7 | data]

P15: [z | x | N3.4 | N3.7 | data]

Your Answers:

LINK	Format (P1, P2,, or P15)
[1]	P2
[2]	P2
[3]	P2
[4]	P13
[5]	P13

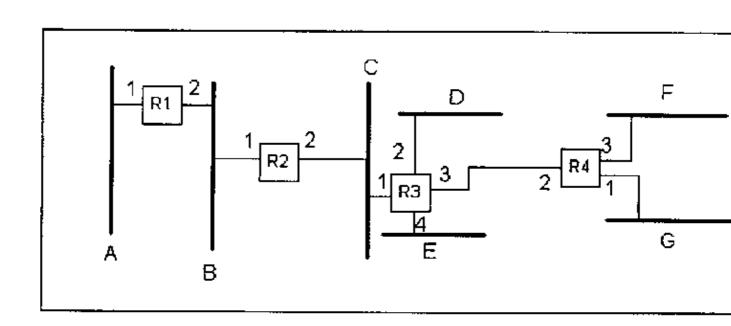

2. CIDR Addressing (5 out of 20)

Your Answers: 2

EE 122, Midterm #1, Spring 2001 Solutions

The network above uses CIDR addressing. A-G are subnets separated by the routers R1-R4.

G: 01 G: 111 G: 1111 G: 000		Assignment 1 A: 1011 B: 1010 C: 10101 D: 10100 E: 10110 F: 00 G: 01	Assignment 2 A: 1001 B: 1000 C: 1010 D: 10110 E: 10111 F: 110 G: 111	Assignment 3 A: 01 B: 010 C: 101 D: 100 E: 110 F: 1110 G: 1111	Assignment 4 A: 10 B: 110 C: 1110 D: 11110 E: 111110 F: 1111111	Assignme A: 101 B: 101 C: 110 D: 011 E: 010 F: 001 G: 000
-----------------------------	--	---	--	--	---	---

Your task is to determine which of the following CIDR prefix assignments for A-G are feasible and which are not.

For each assignment (1 through 5), mark with a cross in the appropriate column whether it is feasible or unfeasible.


Your Answers:

Assignments	Feasible	Unfeasible
1		X (n1)
2	X	
3		X (n2)
4	X	
5		X (n2)

Notes:

- (n1): Some addresses could be common for A and C (e.g., 1010***)
- (n2): Some addresses could be common for A and B
- (n3): A and B are the same.

3. OSPF (5 out of 20)

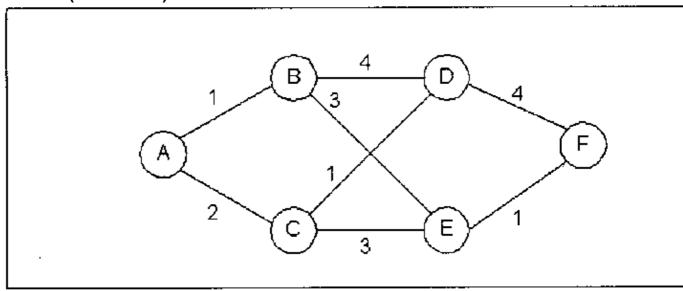

In the graph above, the links go from left to right and have the lengths shown in the figure. We use Dijkstra's algorithm tree of shortest paths from A to all the destinations. Your task is to indicate the list of labels of all the nodes at the succesteps of the algorithm. Initially, all the labels are 'infinity: Y', except the label of node A that is 0. Put a star (*) next to a node whose children have been explored. For instance, label 2* for node D means that at the current step of the algorishm A to D has length 2 and all the children of D have been examined from node D. At each step, the algorithm only one node.

(Each column corresponds to one step of the algorithm. There may be more columns than actual steps until the algorith completes.)


Your Answer:

Your Answers: 4

EE 122, Midterm #1, Spring 2001 Solutions

Node\ Step ->	1	2	3	4	5	6	7	8	9	10	11	12
A	0	0	0*	0*	0*	0*	0*	0*				
В	¥	1	1	1	1*	1*	1*	1*				
С	¥	¥	2	2	2	2*	2*	2*				:
D	¥	¥	¥	4	4	3	3*	3*				
Е	¥	¥	¥	¥	4	4	4	4*				
F	¥	¥	¥	¥	¥	¥	7	5*				



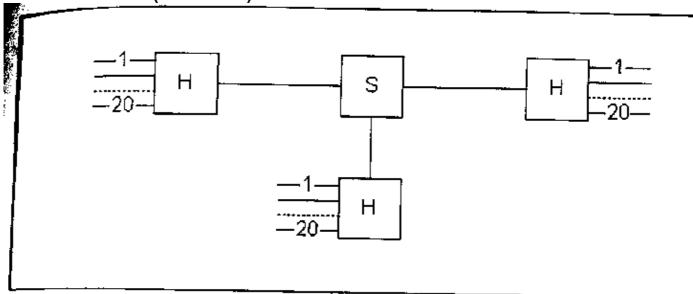

In the network above, assume that all the links are 100-Mbps links and that all the devices want to transmit at an avera bps. Every hub is attached to the switch and to 20 devices. We assume that the traffic is symmetric: Each device sends same average rate to every other device. As we have done so far, we assume that the MAC protocol is perfectly efficie the maximum possible value of R?

(Be careful, no partial credit is given for this problem. Either you get it right or you don't. We accept a numerical error 5%.)

Your Answer:

Your Answer: 5

***** NO SOLUTION AVAILABLE FOR THIS PROBLEM *****

Posted by HKN (Electrical Engineering and Computer Science Honor Society)
University of California at Berkeley
If you have any questions about these online exams
please contactexamfile@hkn.eecs.berkeley.edu.

Your Answer: 6